



Mesh Preps

A selection of mesh preps which have proven cleaning and degreasing performance. Xtend is formulated to optimize the adhesion of emulsion to the mesh, and prolong stencil life. Xtend mesh preps condition the fabric to prevent pinholes and fish eyes caused by dust and grease contamination. Can be applied manually by brush, or via the Xtend air powered spray pump system.


Heavy Duty Mesh Prep

- Excellent cleaning and degreasing performance
- Effective sheeting action
- Rinses quickly


Aqua Coat Mesh Prep

- Designed for use with liquid emulsion and capillary films
- Superb sheeting action
- Promotes consistent emulsion build over flattened mesh

Application Instructions

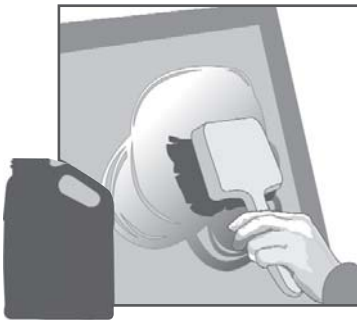

1. Apply generously to both sides of screen with brush, using circular motion.



2. Rinse both sides of screen with low pressure water.

NOTE: Avoid any contact with metal as it will discolor the product over time and can potentially lead to mesh staining.

The information and recommendations contained in this Technical Data Sheet, as well as technical advice otherwise given by representatives of our Company, whether verbally or in writing, are based on our present knowledge and believed to be accurate. However, no guarantee regarding their accuracy is given as we cannot cover or anticipate every possible application of our products and because manufacturing methods, printing stocks and other materials vary. For the same reason, our products are sold without warranty and on condition that users shall make their own tests to satisfy themselves that they will meet fully their particular requirements. Our policy of continuous product improvement might make some of the information contained in this Technical Data Sheet out of date and users are requested to ensure that they follow current recommendations.

Fujifilm North America Corporation, Graphic Systems Division

1101 W. Cambridge Drive
Kansas City, KS 66103 USA
1-800-255-4562/(913) 342-4060 Fax: (913) 342-4752
1101 W. Cambridge Drive
Kansas City, KS 66103 USA
1-800-255-4562/(913) 342-4060 Fax: (913) 342-4752

Revised: July 2008
SMP93

Standard Product Range

XMP-HD Heavy Duty Mesh Prep
XMP-AC Aqua Coat Mesh Prep

Xtend Mesh Preps are available in 1 gallon, 5 gallon and 55 gallon containers.

Storage

Containers should be tightly closed immediately after use. Xtend mesh preps should not be stored in direct sunlight or extreme temperatures. Refer to Material Safety Data Sheet (MSDS) for materials and conditions to be avoided. In the interest of maximum shelf life, ideal storage temperatures are between 41°F (5°C) and 77°F (25°F). When stored in a cool environment, Xtend mesh preps are expected to have the following shelf lives from the date of manufacture:

- XMP-HD 36 months
- XMP-AC 18 months

Safety and Handling

Refer to MSDS for safety, handling, and waste disposal information.

SERICOL
More than ink...Solutions.™
FUJIFILM