



Blockout

An easily applied, removable solvent and abrasion resistant screen blockout. It is high in contrast, and fast drying for ease of use. The superb flexibility guarantees long run durability, and reduces downtime.

Screen Blockout 61

- Bright red color gives excellent contrast
- Fast drying
- Low odor
- Flash point 115°F
- Superb flexibility ensures long run durability
- Washes out easily after end of job

Standard Product Range

XSB-61 Screen Blockout 61

Xtend Blockout is available in 1 gallon containers as standard.


Storage

Containers should be tightly closed immediately after use. Xtend Blockout should not be stored in direct sunlight or extreme temperatures. Refer to Material Safety Data Sheet (MSDS) for materials and conditions to be avoided. In the interest of maximum shelf life, ideal storage temperatures are between 41°F (5°C) and 77°F (25°F). When stored in a cool environment, Xtend Blockout is expected to have a shelf life of a 36 months from the date of manufacture.


Safety and Handling

Refer to MSDS for safety, handling, and waste disposal information.


Application Instructions



1. Apply to screen and smooth with card.



2. Use a fine brush to block out pinholes in areas of detail.

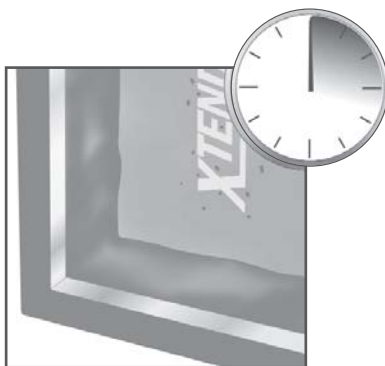

3. Allow to dry before beginning print run.

The information and recommendations contained in this Technical Data Sheet, as well as technical advice otherwise given by representatives of our Company, whether verbally or in writing, are based on our present knowledge and believed to be accurate. However, no guarantee regarding their accuracy is given as we cannot cover or anticipate every possible application of our products and because manufacturing methods, printing stocks and other materials vary. For the same reason, our products are sold without warranty and on condition that users shall make their own tests to satisfy themselves that they will meet fully their particular requirements. Our policy of continuous product improvement might make some of the information contained in this Technical Data Sheet out of date and users are requested to ensure that they follow current recommendations.

Fujifilm North America Corporation, Graphic Systems Division

1101 W. Cambridge Drive
Kansas City, KS 66103 USA
1-800-255-4562/(913) 342-4060 Fax: (913) 342-4752

Updated: December 2006
SMP93

SERICOL
More than ink...Solutions.™
FUJIFILM