

Revoria Press E1136 / E1125 / E1110 / E1100

Enter the Monoverse



# The World of Wonder in Monochromatic Print Production.

- Outstanding print speed of 136 ppm\*.
- High Capacity Feeders and High Capacity Stacker make continuous mass printing possible.
- Offering the latest finisher lineup. Cover insertion, three-sided trim, and Saddle stapled booklet with Square Back supported.
- Simple Image Quality Adjustment (SIQA) makes alignment adjustment easy.
- Equipped with various copy and scan functions useful for office operation.

\* A4 LEF, Revoria Press E1136.



## Productivity & Stability


### On-demand press with high productivity and stability.

#### Technologies supporting high-speed printing

High-speed continuous printing of 136 ppm\*<sup>1</sup> has been realised for both 1-sided and 2-sided printing. Reliable fusing on paper transported in high-speed is now possible with EA-Eco LGK\*<sup>2</sup> toner that allows fusing at lower temperature than existing models and a roll type fusing unit providing constant heat supply.

\*1: For Revoria Press E1136 with A4 LEF on continuous printing of the same original document.

\*2: EA: Emulsion Aggregation LGK: Low Gloss Kuro (Black)

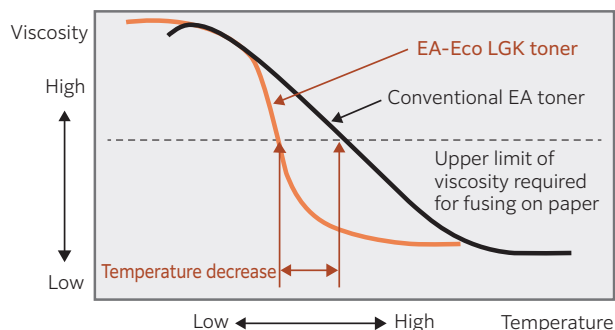

#### Continuous mass printing enabled


You can enjoy seamless operation at continuous mass printing as cartridge replacement and paper refill can be done while printing is in progress. A single high capacity toner cartridge can yield approximately 71500 pages\* for printing.

\* A4 LEF size, area coverage 6% at continuous printing. Reference of FUJIFILM Business Innoavtion test criteria.

#### Stable paper transport


Wide turning angles in paper path provide stable and speedy paper transport. This device has a good resistance against paper jam by adopting vertical paper inversion mechanism for 2 sided printing to reduce curves in the paper path.

In addition, there is less impact caused by heat generated by fused paper on the transfer mechanism and it hardly causes troubles with paper path and image quality.



#### "Air Suction Feeder C1-DS" with enhanced paper handling capabilities

Shuttle head draws up the paper strongly using a small amount of air, it easily separates and delivers each sheet efficiently. This even improves feed performance of paper with a lot of paper dust, pre-printed paper using powder, paper with uneven texture, and coated paper that is prone to sticking. Stable and high-speed feed is achieved for various paper types, from lightweight to heavyweight, small-sized paper and long paper.





## Quality

### Exceptionally beautiful, high quality printing.

#### High resolution printing of 2400 × 2400 dpi

The heart of the printer, ROS\*<sup>1</sup>, uses VCSEL\*<sup>2</sup> as a light source.

It enables printing at 2400 × 2400 dpi high resolution by drawing images simultaneously with 32 laser beams.

\*1: Raster Output Scanner

\*2: Vertical Cavity Surface Emitting Laser

#### EA-Eco LGK\* toner for high image quality

EA-Eco LGK toner with extremely small particle size of 6.5 microns allows reproduction of photograph gradation in a smooth and beautiful way, density uniformity in figures, and small text clearly. It also produces easy-to-read printed text with less glare which is also easy on your eyes.

\* EA: Emulsion Aggregation LGK: Low Gloss Kuro (Black)

#### Transfer unit with high image quality design

Designed to prevent fluctuations in paper transport speed even in a compact body. Stabilize driving speed of the transfer belt by increasing the roll diameter. Automatic adjustment of contact pressure between transfer belt and drum. It ensures consistent transfer even on thin or thick paper.

#### Ultra high precision registration - IReCT\*

This digital image registration control technology "IReCT\*" precisely measures the position of sheets running in high-speed and realises real time correction to misregistration of printing images and distortion on each sheet with ultra high precision registration, which cannot be achieved by mechanical correction technology alone.

\* Image Registration Control Technology

#### Maintain printing quality with easy adjustment

Simple Image Quality Adjustment (SIQA), which realises simple alignment adjustments has been installed. For optimal adjustment, you can just print and scan the calibration chart. It ensures consistent printing quality with properly adjusted print position, perpendicularity, skew and magnification on both the front and back sides.

#### More screen choices

Various screen settings\*<sup>1</sup> including FM screen that suppresses moire\*<sup>2</sup> are now available.

\*1: PCL Driver: 6 screens,  
PostScript® Driver: 12 screens,  
Print Server driver: 10 screens.

\*2: A phenomenon in which streaks not existing on the original appear when repeatedly printing patterns at regular intervals.




141 Line (AM Screen)

Stochastic Screen (FM Screen)

#### Image Enhancement in a more beautiful way

Higher image quality has been implemented with "Edge Enhancement" that fixes jaggedness on the edge of thin line and text outline and "Adjust Invert Text/Line Weight" that fixes thickened/blurred text.

Adjust Invert Text/Line Weight is ON (8 pt character)




Fixed thickened text

Fixed blurred text

Note: Default setting: OFF

#### No more multifeed, and mixed blank pages

The multifeed detection sensor monitors the paper flow to prevent the feeding of multiple sheets of paper. If a multifeed is detected, printing is interrupted to prevent blank page insertion.

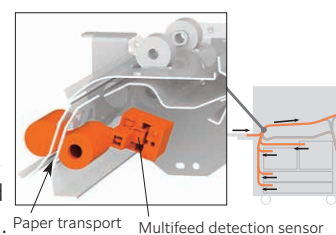

Note: The multifeed detection feature is not available on Revoria Press E1100.

## A wider range of media types and finishes.

### Media handling capabilities

This device can handle a wide range of paper weights from lightweight paper of 52 gsm to heavyweight paper of 350 gsm. The upper limit of heavyweight paper has been extended thanks to the paper path design, and employing the control mechanism that automatically switches fusing roll pressure between two levels. Not only that, it allows fine control to extend the support range of coated paper and specialty paper\*1. Paper sizes ranging from A6 to 330.2 x 488 mm are available. Full-bleed printing on SRA3 (320 x 450 mm) is also possible and it is useful to create brochures or leaflets that need to have bleed. Further, banner printing on long paper of up to 660.4 mm is now available.\*2 New print applications will expand such as powerful panoramic posters.


\*1: Please contact our sales representative for inquiries about capability with specialty paper.

\*2: Please contact our sales representative for paper feeder or output module that is required for Banner Printing on long paper.

Note: Performance is not guaranteed for all paper media. Contact our sales representative for available paper types.

### Printing with right settings for each media type

A maximum of 100 paper types can be registered with "Custom Paper Settings". It allows configuration settings such as alignment, fold position, fusing temperature according to paper to be used and produce printout with high image quality.

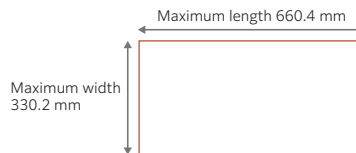

### Flexible feeding and finishing options

These options make it possible to build flexible printing systems suited to every printing operation.

Note: The photo shows Finisher D6 with Booklet Maker 7.

Square Back Fold Trimmer D1 8 cannot be connected to Finisher D6 6.



#### Feeding options

Up to a total of 8250 sheets can be loaded. You can enjoy long-time seamless operation at continuous mass printing with less paper refill frequency.



**High Capacity Feeder C1-D2**  
Maximum A4 x 2 trays  
2000 sheets x 2 trays



**High Capacity Feeder B1-S\***  
Maximum A3, 330.2 x 488 mm  
2000 sheets x 1 tray  
Air assist  
\*Not available on Revoria Press E1136.



**High Capacity Feeder C3-DS\***  
Maximum A3, 330.2 x 488 mm  
2000 sheets x 2 trays  
Air assist  
\*Not available on Revoria Press E1100.



**Air Suction Feeder C1-DS\***  
Maximum A3, 330.2x488 mm  
2100 sheets x 2 trays + 250 sheets  
Air suction  
\*Not available for Revoria Press E1100.

#### Finishing options

##### 1 Interface Decurler Module D1

-Real-time paper curl correction

##### 2 Inserter D1

-Cover/sheet insertion

##### 3 High Capacity Stacker A1\*1

-5000-sheet offset-stacking for mass printing  
-Stacker cart

##### 4 Crease/Two-sided Trimmer D2\*1

-Two-sided trim  
-Crease

##### 5 Folder Unit CD2

-Z fold half sheet/Tri-fold

##### 6 Finisher D6

-100-sheet stapling with auto staple cutting  
-Hole punch\*2

##### 7 Finisher D6 with Booklet Maker

-100-sheet stapling with auto staple cutting  
-Hole punch\*2  
-Saddle staple/Single fold

##### 8 Square Back Fold Trimmer D1\*1\*3

-Face trim  
-Square back

##### Simple Catch Tray\*4

##### Offset Catch Tray\*4


\*1: Not available on Revoria Press E1100.

\*2: Optional.

\*3: Available only with Finisher D6 with Booklet Maker.

\*4: Available on Revoria Press E1100.

#### A variety of finishing features

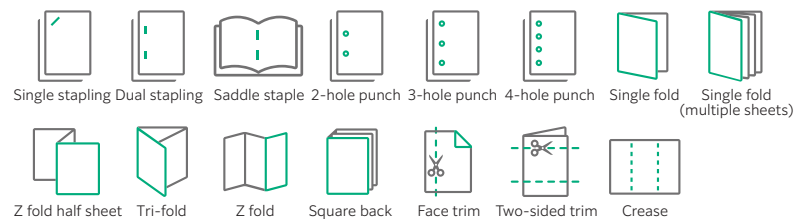

#### Continuous mass printing enabled

High Capacity Stacker A1 can accommodate up to 5000 sheets. The printed sheets are directly delivered to the stacker cart (carriage). It is useful when carrying large volumes of printouts to off-line post-processing devices.

# Print server with high image quality and fast processing.

### Print Server with high image quality and high-speed

The Print Server with 64-bit architecture delivers high speed RIP and high image quality, with image processing technologies cultivated in the development of colour production printers.



### Image data processing maximising print engine performance

High quality image data can be generated with RIP processing of 600 x 600 dpi and 8 bit (256 gradation levels) on the Print Server.

In addition, high resolution and smooth screen image of 2400 x 2400 dpi can be generated on the device with our unique HQ digital screen technology (MACS\*) employed. These data processing technologies have realised high image quality brought from the maximisation of the print engine performance.

\* Micro Accurate Control Screen.

### Supporting Adobe® PDF Print Engine perfect for PDF output

Adobe® PDF Print Engine directly rips PDF data. Even a PDF file with transparency or layers can be processed as it is and faster and high quality output is possible.

Blur, drop shadow and glow effect can be used with ease.

Note: Adobe® PDF Print Engine is available for jobs in PDF and JDF formats.

### Print Server equipped with high-speed technologies

#### ● Faster processing with less data volume

Our unique intermediate data format streamlines RIP processing with high image quality and small data size. In the conventional RIP processing, calculation takes a long time due to large data volume. However, this new RIP processing automatically identifies objects including text and image and processes them in the format. It greatly reduces the processing time without degrading image quality.

#### ● High-speed serial transmission

The print server sends huge raster data to the printer with a wideband transmission of 4.25 Gbps. It ensures high reliability by automatically detecting and correcting errors.

### High-speed, large volume printing of variable data

High-speed, large volume printing of personally customised documents: direct mails, bills, usage details statements, etc. is enabled. It meets the business needs of One to One marketing which captures diversifying customers' individual needs. With industry standard PPML\*, PDF/VT-1, and PDF/VT-2, languages for variable data printing are supported to establish extended variable printing systems.

\* PPML: Personalized Print Markup Language

### Building JDF workflow

JDF\*1, which is the standard in the printing industry is supported. Linking with integrated workflow systems for printing operation\*2, you can build a hybrid workflow with offset printing device and digital printer.



\*1: JDF: Job Definition Format

\*2: Linked with "FUJIFILM WORKFLOW XMF" of FUJIFILM Corporation and "EQUIOS" and "Trueflow SE" of SCREEN Graphic Solutions Co., Ltd.

## Various features for office needs.

### Duplex Automatic Document Feeder

It scans the front and back sides of the original simultaneously. Scan functions make it possible to read documents in high-speed of 136 ppm for 1 sided and 270 ppm\* for 2 sided.


|           | 1 sided  | 2 sided  |
|-----------|---|---|
| Scan job* | 136 ppm<br>(Colour/BW)  | 270 ppm<br>(Colour/BW)  |
| Copy job  | 100 ppm (BW)  |   |

\* Standard Document (A4), 200 dpi, to Folder.

### A wide variety of scan functions

The following useful scan functions are available.

- Store to Folder\*<sup>1</sup>
- E-mail
- Scan to PC\*<sup>2</sup>

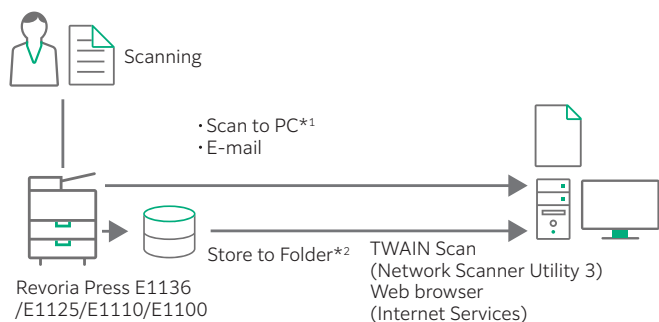

\*1: Scanned files are sent and stored to PC folders via FTP transfer or SMB.

\*2: Scanned files are stored to Folders on the device. To store them to PC, use web browsers, Stored File Manager 3 belonging to Network Scanner Utility 3, or TWAIN compliant applications.

## Reliable maintenance support and security management.

### Security support for print data

Important print data provided by customers can be protected from data breaches by securely erasing\*<sup>1</sup> deleted data remaining in the print server so that the data cannot be recovered even with data recovery software. Besides, data in the printer can be encrypted\*<sup>1</sup> or securely erased\*<sup>2</sup> to prevent unauthorised access.

\*1: Default setting: OFF

\*2: Optional.

### Authentication

Authentication features prevent unauthorised use of the device for security. Authentication operations can be performed at the device control panel. User information can be saved and managed on the device.

## Revoria Press E1136 / E1125 / E1110 / E1100 Functions & Specifications

### Print Function

| Item                       | Description  |
|----------------------------|--|
| Type                       | Internal   |
| Continuous Print Speed     | Same as the Basic Specifications   |
| Printing Resolution        | Standard [PCL Driver]<br>Standard: 2400 x 2400 dpi, High Resolution: 2400 x 2400 dpi<br>[Adobe® PostScript® 3™ Driver]<br>Standard: 2400 x 2400 dpi, High Resolution: 2400 x 2400 dpi  |
| Page Description Language  | PCL, Adobe® PostScript® 3™   |
| Supported Operating System | Standard [PCL Driver]<br>Windows 10 (32bit / 64bit), Windows 8.1 (32bit / 64bit), Windows Server 2019 (64bit), Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit)<br>[Adobe® PostScript® 3™ Driver]<br>Windows 10 (32bit / 64bit), Windows 8.1 (32bit / 64bit), Windows Server 2019 (64bit), Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit)<br>macOS 11 / 10.15 / 10.14 / 10.13 / 10.12<br>[Mac OS X Driver]<br>macOS 11 / 10.15 / 10.14 / 10.13 / 10.12 |
| Interface                  | Standard Ethernet 100BASE-T / 100BASE-TX / 10BASE-T, USB2.0  |

\*: Please refer to our official website for the latest supported OS.

# Revoria Press E1136 / E1125 / E1110 / E1100 Functions & Specifications

## Basic Specifications

| Item                      | Description   |  |   |         |
|---------------------------|---|--|---|---------|
|                           | E1136   | E1125  | E1110   | E1100   |
| Printing Resolution       | 2400 x 2400 dpi   |  |   |         |
| Continuous Print Speed*1  | A4<br>136 ppm   | 125 ppm  | 110 ppm   | 100 ppm |
|                           | A3<br>68 ppm  | 62 ppm   | 55 ppm  | 50 ppm  |
| Paper Size*2              | Tray 1, 2 Standard Size: Max A4, Letter, Min JIS B5   |  |   |         |
|                           | Tray 3, 4 Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A5 Custom Size: 140 x 182 mm to 330 x 488 mm       |  |   |         |
|                           | Bypass Tray*3 Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A6 Custom Size: 100 x 148 mm to 330 x 488 mm*4 |  |   |         |
| Paper Weight              | Tray 1, 2, 3, 4 52 to 216 gsm   |  |   |         |
|                           | Bypass Tray*3 52 to 350 gsm*5   |  |   |         |
| Paper Tray Capacity*6     | Standard 3800 sheets (1100 sheets + 1600 sheets + 550 sheets x 2-tray)  |  |   |         |
|                           | Optional  | [E1136]<br>Multi Sheet Inserter: 250 sheets<br>High Capacity Feeder C1-D2: 2000 sheets x 2<br>High Capacity Feeder C3-DS: 2000 sheets x 2<br>Air Suction Feeder C1-DS: 2100 sheets x 2 + 250 sheets [E1125 / E1110]<br>Multi Sheet Inserter: 250 sheets<br>High Capacity Feeder C1-D2: 2000 sheets x 2<br>High Capacity Feeder B1-S: 2000 sheets x 1<br>High Capacity Feeder C3-DS: 2000 sheets x 2<br>Air Suction Feeder C1-DS: 2100 sheets x 2 + 250 sheets [E1100]<br>Multi Sheet Inserter: 250 sheets<br>High Capacity Feeder C1-D2: 2000 sheets x 2<br>High Capacity Feeder B1-S: 2000 sheets x 1 |   |         |
|                           |   | Max  | E1136 / E1125 / E1110: 8250 sheets [Standard + Air Suction Feeder C1-DS]<br>E1100: 8050 sheets [Standard + High Capacity Feeder C1-D2 + Multi Sheet Inserter] |         |
| Output Tray Capacity      | Depends on the specification of output option   |  |   |         |
| Power Supply              | AC200-240 V +/- 10 %, 1.5 A, 50/60 Hz common  |  |   |         |
| Maximum Power Consumption | 3.6 kW<br>Sleep Mode: 1.1 W, Low Power Mode: 229 W  |  |   |         |
| Dimensions*7              | W 840 x D 783 x H 1144 mm   |  |   |         |
| Weight*8                  | 257 kg  |  |   | 256 kg  |

\*1: Print speed may be reduced depending on conditions of output data and other reasons. \*2: Image loss width (326 x 486 mm or smaller paper): PCL Print Driver (Margins: Standard) 4.1 mm for all edges, Revoria Flow E11 3.0 mm for all edges. \*3: When High Capacity Feeder B1-S, High Capacity Feeder C3-DS or Air Suction Feeder C1-DS is not connected. \*4: Banner sheet printing of up to 330 x 660 mm is available. Banner sheet printing is available for Revoria Press E1136 / E1125 / E1110. \*5: Banner sheet printing of 64 to 216 gsm is available. Banner sheet printing is available for Revoria Press E1136 / E1125 / E1110. \*6: 80 gsm paper. \*7: Main unit only. Excludes output tray. Bypass Tray is closed. \*8: Excludes toner cartridge.

## Scan Function

| Item            | Description  |
|-----------------|--|
| Scan Resolution | 600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi           |
| Scan Speed      | Same as the "Scan Speed" for the Duplex Automatic Document Feeder    |
| Scanning Method | Store to folder (TWIN Interface support), Scan to PC, Scan to e-mail |

## Copy Function

| Item                      | Description                                    |       |       |               |
|---------------------------|--|-------|-------|---------------|
|                           | E1136  | E1125 | E1110 | E1100         |
| Scan Resolution           | 600 x 600 dpi                                  |       |       |               |
| Printing Resolution       | 600 x 600 dpi, Equivalent to 2400 x 2400 dpi*1 |       |       |               |
| First Copy Output Time *2 | 3.9 sec. (A4)                                  |       |       | 4.6 sec. (A4) |

\*1: When the Image Enhancement feature is enabled. \*2: When the original is set on the document glass and copies are output to the output tray of Finisher D6 or Finisher D6 with Booklet Maker.

## Print Server [Revoria Flow E11] (Optional)

| Item                         | Description  |
|------------------------------|--|
| Ty                           | External   |
| CPU                          | Intel® Core™ i3 8100 Processor 3.60 GHz  |
| Storage device               | Hard disk: 1 TB, DVD Multi drive   |
| Memory capacity              | 16 GB (Max: 16 GB)   |
| Server Operation System      | Windows 10 IoT Enterprise (64 bit)   |
| Page Description Language    | Adobe® PostScript® 3™, PDF/VT-1, PDF/VT-2, PPLM  |
| Print Data Format            | PS, PDF1.7, PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-5, EPS, TIFF, JPEG   |
| Supported Operating System*1 | Windows 10 (32bit / 64bit), Windows 8.1 (32bit / 64bit), Windows Server 2019 (64bit), Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit), macOS 11 / 10.15 / 10.14 / 10.13 / 10.12 |
| Interface                    | Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T x 2, USB3.1 x 4, USB2.0 x 4  |
| Network Protocol             | TCP/IP (lpr / FTP / SMB / HTTP), Bonjour   |
| Power Supply                 | AC100-240 V +/- 10 %, 5.0 A-2.5 A, 50/60 Hz common   |
| Maximum Power Consumption    | 0.26 kW  |
| Dimensions*2                 | W 98 x D 400 x H 340 mm  |
| Weight*2                     | 7 kg   |

\*1: Please refer to our official website for the latest supported OS. \*2: Print Server only. Excludes LCD monitor, keyboard, and mouse.

## Duplex Automatic Document Feeder

| Item                         | Description   |
|------------------------------|---|
| Original Size / Paper Weight | Max: A3, 11x17", Min: A6*1<br>38 to 200 gsm (In Duplex: 50 to 200 gsm)                |
| Capacity*2                   | 250 sheets  |
| Scan Speed                   | Copy 100 ppm (A4 LEF, 1 Sided)  |
|                              | Scan 1 sided: 136 ppm, 2 sided: 270 ppm [Standard Document (A4), 200 dpi, to Folder.] |

\*1: 84x140 mm for custom size \*2: 80 gsm paper.

## High Capacity Feeder C1-D2 (Optional)

| Item                               | Description              |
|------------------------------------|--------------------------|
| Paper Size                         | A4, Letter, JIS B5       |
| Paper Weight                       | 52 to 216 gsm            |
| Feeding Capacity* / Number of Tray | 2000 sheets x 2-tray     |
| Dimensions                         | W 597 x D 661 x H 930 mm |
| Weight                             | 73 kg                    |

\*: 80 gsm paper.

## High Capacity Feeder B1-S / High Capacity Feeder C3-DS (Optional)

| Item                               | Description  |   |
|------------------------------------|--|---|
|                                    | High Capacity Feeder B1-S  | High Capacity Feeder C3-DS  |
| Paper Size                         | [Tray 6]<br>Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min JIS B5<br>Custom Size: 100 x 148 mm to 330 x 488 mm<br>[Bypass Tray*1]<br>Custom Size: 100 x 148 mm to 330 x 488 mm | [Tray 6, 7]<br>Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min JIS B5<br>Custom Size: 100 x 148 mm to 330 x 488 mm<br>[Bypass Tray*1]<br>Custom Size: 100 x 148 mm to 330 x 488 mm*2 |
|                                    | [Tray 6] 52 to 300 gsm<br>[Bypass Tra*1] 52 to 253 gsm   | [Tray 6, 7] 52 to 350 gsm<br>[Bypass Tray*1] 52 to 253 gsm*3  |
| Feeding Capacity/ Number of Tray*4 | 2000 sheets x 1-tray   | 2000 sheets x 2-tray  |
| Power Supply                       | AC100-120 V +/- 10 %, 2.5 A, AC220-240 V +/- 10 %, 1.5 A, 50/60 Hz common  | AC100-120 V +/- 10 %, 6 A, AC220-240 V +/- 10 %, 4 A, 50/60 Hz common   |
| Maximum Power Consumption          | 330 W  | 880 W   |
| Dimensions                         | W 988 x D 762 x H 992 mm   | W 988 x D 762 x H 992 mm  |
| Weight*8                           | 160 kg   | 215 kg  |

Note: High Capacity Feeder B1-S is available on Revoria Press E1125 / E1110 / E1100. Note: High Capacity Feeder C3-DS is available on Revoria Press E1136 / E1125 / E1110. \*1: When these options are installed, attach the optional Multi Sheet Inserter to the top of High Capacity Feeder B1-S or High Capacity Feeder C3-DS. \*2: Banner sheet printing of up to 330 x 660 mm is available. \*3: Banner sheet printing of 64 to 216 gsm is available. \*4: 80 gsm paper.

## Air Suction Feeder C1-DS (Optional)

| Item                                | Description   |
|-------------------------------------|---|
| Paper Size                          | [Tray 6, 7]<br>Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min JIS B5<br>Custom Size: 100 x 148 mm to 330 x 488 mm<br>[Bypass Tray*1]<br>Custom Size: 100 x 148 mm to 330 x 488 mm*2 |
|                                     | [Tray 6, 7] 52 to 350 gsm<br>[Bypass Tray*1] 52 to 253 gsm*3  |
| Feeding Capacity / Number of Tray*4 | 2100 sheets x 2-tray + 250 sheets   |
| Power Supply                        | AC100-120 V +/- 10 %, 5 A, AC220-240 V +/- 10 %, 4 A, 50/60 Hz common   |
| Maximum Power Consumption           | 880 W   |
| Dimensions                          | W 988 x D 762 x H 992 mm  |
| Weight                              | 194 kg  |

Note: Air Suction Feeder C1-DS is available on Revoria Press E1136 / E1125 / E1110. \*1: When this option is installed, attach the standard Bypass Tray to the top of Air Suction Feeder C1-DS. \*2: Banner sheet printing of up to 330 x 660 mm is available. \*3: Banner sheet printing of 64 to 216 gsm is available. \*4: 80 gsm paper.

## Inserter D1 (Optional)

| Item             | Description  |
|------------------|--|
| Paper Size       | Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A5*1<br>Custom Size: 182 x 148 mm to 330 x 488 mm |
| Paper Weight     | 52 to 350 gsm  |
| Paper Capacity*2 | 250 sheets   |
| Power Supply     | Supplied from the Interface Decurler Module D1, Finisher D6, or Finisher D6 with Booklet Maker                             |
| Dimensions*3     | W 700 x D 725 x H 1235 mm  |
| Weight           | 45 kg  |

Note: Exclusive optional for Finisher D6 or Finisher D6 with Booklet Maker. Inserter D1 or Interface Decurler Module D1 is necessary for connecting Finisher D6 or Finisher D6 with Booklet Maker without connecting High Capacity Stacker A1. Note: Cannot print on the paper loaded in Inserter D1. \*1: Available when custom size is entered. \*2: 80 gsm paper. \*3: The width of the paper transfer part only when connected to the device is 165 mm.

## High Capacity Stacker A1 (Optional)

| Item                      | Description  |
|---------------------------|--|
| Paper Capacity*1          | Output Tray 500 sheets   |
|                           | High Capacity Stacker - Stacker Cart 5000 sheets or stacking height is less than 570 mm.   |
| Paper Size                | Output Tray Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A6 Custom Size: 100 x 148 mm to 330 x 488 mm*2                            |
|                           | High Capacity Stacker - Stacker Cart Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min JIS B5 Custom Size: 203 x 182 mm to 330 x 488 mm |
| Paper Weight              | Output Tray 52 to 350 gsm*3  |
|                           | High Capacity Stacker - Stacker Cart 52 to 300 gsm   |
| Power Supply              | AC100-240 V +/- 10 %, 1.5 A (100 V) / 0.8 A (240 V), 50/60 Hz common   |
| Maximum Power Consumption | 192 W  |
| Dimensions                | W 800 x D 725 x H 1042 mm  |
| Weight*4                  | 155 kg   |

Note: High Capacity Stacker A1 is available on Revoria Press E1136 / E1125 / E1110. Note: Interface Decurler Module D1 is required. \*1: 80 gsm paper. \*2: Banner sheet printing of up to 330 x 660 mm is available. \*3: Banner sheet printing of 64 to 216 gsm is available. \*4: Including Stacker Cart.

# Revoria Press E1136 / E1125 / E1110 / E1100 Functions & Specifications

## Finisher D6 / Finisher D6 with Booklet Maker (Optional)

| Item                      | Description   |  |  |
|---------------------------|---|--|--|
|                           | Finisher D6   | Finisher D6 with Booklet Maker   |  |
| Type                      | Output Tray   | Sort / Stack   |  |
|                           | Finishing Tray  | Sort (Offset available) / Stack (Offset available)   |  |
|                           | Booklet Tray  | - Sort / Stack   |  |
| Paper Size                | Output Tray   | Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A6<br>Custom Size: 100 x 148 mm to 330 x 488 mm*1 |  |
|                           | Finishing Tray  | Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A5<br>Custom Size: 148 x 148 mm to 330 x 488 mm   |  |
| Paper Weight              | Output Tray   | 52 to 350 gsm*2  |  |
|                           | Finishing Tray  | 52 to 350 gsm  |  |
| Paper Capacity*3          | Output Tray   | 500 sheets (A4)  |  |
|                           | Finishing Tray  | [Without Stapling]<br>A4: 3000 sheets<br>JIS B4 or larger: 1500 sheets<br>Mixed Size Stacking*4 : 350 sheets               | [Without Stapling]<br>A4: 2000 sheets<br>JIS B4 or larger: 1500 sheets<br>Mixed Size Stacking*4 : 350 sheets   |
|                           |   | [With Stapling]<br>A4: 200 sets or 3000 sheets<br>JIS B4 or larger: 100 sets or 1500 sheets                                | [With Stapling]<br>A4: 200 sets or 2000 sheets<br>JIS B4 or larger: 100 sets or 1500 sheets  |
|                           | Booklet Tray  | - 20 sets*5  |  |
|                           | Capacity  | 100 sheets*6 (90 gsm or less)  |  |
| Staple                    | Paper Size*7  | Standard Size: Max A3, 11 x 17", Min JIS B5<br>Custom Size: 182 x 148 mm to 297 x 431 mm                                   |  |
|                           | Paper Weight  | 52 to 300 gsm  |  |
|                           | Position  | Single stapling*8, Dual stapling   |  |
| Punch*9                   | Number of Holes   | 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)   |  |
|                           |   | Paper Size*10  | Standard Size<br>2-hole punch: JIS B5, A4, Letter, JIS B4, A3, 11 x 17"<br>3-hole punch: JIS B5, A4, Letter, JIS B4, A3, 11 x 17"<br>4-hole punch: A4, Letter, A3, 11 x 17"<br>Custom Size<br>2-hole punch: 203 x 182 mm to 297 x 431 mm<br>3-hole punch: 254 x 182 mm to 297 x 431 mm<br>4-hole punch: 267 x 182 mm to 297 x 431 mm |
|                           | Paper Weight  | 52 to 220 gsm  |  |
|                           | Capacity*11   | -  | Saddle Staple: 30 sheets, Single Fold: 5 sheets  |
|                           | Booklet Finishing   | Paper Size   | -  |
| Paper Weight              |   | -  | 60 to 300 gsm  |
| Power Supply              | AC100-240 V +/- 10%, 3.0 A (100 V) / 1.5 A (240 V), 50/60 Hz common |  |  |
| Maximum Power Consumption | 360 W   |  |  |
| Dimensions                | W 855 x D 725 x H 1200 mm   | W 892 x D 725 x H 1200 mm  |  |
| Weight                    | 87 kg   | 107 kg   |  |

Note: Inserter D1 or Interface Decurler Module D1 is necessary for connecting Finisher D6 or Finisher D6 with Booklet Maker without connecting High Capacity Stacker A1.  
 \*1: Banner sheet printing of up to 330 x 660 mm is available. Banner sheet printing is available on Revoria Press E1136 / E1125 / E1110. \*2: Banner sheet printing of 64 to 216 gsm is available. Banner sheet printing is available on Revoria Press E1136 / E1125 / E1110. \*3: 80 gsm paper.  
 \*4: When larger size sheets are stacked on top of smaller size sheets. \*5: Booklet tray capacity is 20 sets (16 sheets bind and below), 16 sets (17 to 20 sheets bind), 12 sets (21 to 25 sheets bind) and 10 sets (26 to 30 sheets bind). \*6: 65 sheets for sizes exceeding A4. \*7: Available staple positions vary depending on the paper size. \*8: One place rear angled stapling is supported on A4 and A3 only. \*9: Optional. \*10: Available number of punch holes varies depending on the paper size. \*11: The maximum number of sheets varies depending on the paper weight. Booklet may not be tightly closed depending on the size or type of the paper.

- To comply with paper weight specifications, it is recommended to use our recommended paper. Document may not be printed correctly depending on usage conditions.
- Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

## Folder Unit CD2 (Optional)

| Item                      | Description   |              |
|---------------------------|---|--------------|
|                           | Z Fold Half Sheet   | Tri-fold     |
| Paper Size                | Paper Size  | A3, JIS B4   |
|                           | Paper Weight  | 60 to 90 gsm |
| Paper Weight              | Paper Size  | A4, Letter   |
|                           | Paper Weight  | 60 to 90 gsm |
| Paper Capacity*1          | 30 sheets   |              |
| Power Supply              | AC100-240 V +/- 10%, 1.0 A (100 V) / 0.5 A (240 V), 50/60 Hz common |              |
| Maximum Power Consumption | 120 W   |              |
| Dimensions                | W 232xD 725xH 992 mm  |              |
| Weight                    | 55 kg   |              |

Note: Folder Unit CD2 is option for Finisher D6 and Finisher D6 with Booklet Maker.  
 \*1: 80 gsm paper. \*2: Power supply separate from the Main Unit is required.

## Crease/Two-sided Trimmer D2 (Optional)

| Item                      | Description   |  |
|---------------------------|---|--|
|                           | Two-sided Trim  | Crease   |
| Paper Size                | Paper Size  | Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min A4, Letter<br>Custom Size: 194 x 210 mm to 330 x 488 mm |
|                           | Paper Weight  | 52 to 350 gsm  |
| Trim Dimensions           | One side 6 to 25 mm   |  |
|                           | Paper Size  | Standard Size: Max SRA3 (320 x 450 mm), 12.6 x 19.2" (320 x 488 mm), Min JIS B5<br>Custom Size: 182 x 210 mm to 330 x 488 mm     |
| Paper Weight              | 52 to 350 gsm*  |  |
|                           | Number of lines   | 1 to 5   |
| Power Supply              | AC100-240 V +/- 10%, 4.0 A (100 V) / 2.0 A (240 V), 50/60 Hz common |  |
| Maximum Power Consumption | 480 W   |  |
| Dimensions                | W 605xD 725xH 992 mm  |  |
| Weight                    | 128 kg  |  |

Note: This option is available on Revoria Press E1136 / E1125 / E1110.  
 Note: Exclusive optional for Finisher D6 or Finisher D6 with Booklet Maker.  
 \*: 106 gsm or more is supported for single sheet.

## Square Back Fold Trimmer D1 (Optional)

| Item                      | Description  |                 |
|---------------------------|--|-----------------|
|                           | Capacity*2   | Trim dimensions |
| Paper Size                | Same as the paper size of the Finisher D6 Booklet Finishing.   |                 |
| Paper Weight              | Same as the paper weight of the Finisher D6 Booklet Finishing.   |                 |
| Booklet Tray Capacity*1   | 20 sets (16 sheets bind and below), 16 sets (17 to 20 sheets bind), 12 sets (21 to 25 sheets bind), 10 sets (26 to 30 sheets bind) |                 |
|                           | Saddle Staple 30 sheets, Single Fold 5 sheets  |                 |
| Face Trim                 | 2 to 20 mm   |                 |
| Square Back Capacity*2*3  | 30 sheets  |                 |
| Power Supply              | AC100-240 V +/- 10%, 1.0 A (100 V) / 0.6 A (240 V), 50/60 Hz common  |                 |
| Maximum Power Consumption | 100 W  |                 |
| Dimensions                | W 1066xD 725xH 552 mm  |                 |
| Weight                    | 100 kg   |                 |

Note: This option is available on Revoria Press E1136 / E1125 / E1110.  
 Note: Exclusive optional for Finisher D6 with Booklet Maker.  
 \*1: Paper may not be accepted depending on paper type and other usage conditions. \*2: Square back finishing is not supported for Single folding and saddle stapling of less than 5 sheets. \*3: The capacity can decrease depending on type and weight of paper being used and other conditions.

## Interface Decurler Module D1 (Optional)

| Item                      | Description   |                 |
|---------------------------|---|-----------------|
|                           | Capacity*2  | Trim dimensions |
| Power Supply              | AC100-240 V +/- 10%, 2.5 A (100 V) / 1.0 A (240 V), 50/60 Hz common |                 |
| Maximum Power Consumption | 250 W   |                 |
| Dimensions                | W 340xD 725xH 992 mm  |                 |
| Weight                    | 40 kg   |                 |

Note: Interface Decurler Module D1 is necessary for connecting High Capacity Stacker A1 to the printer.  
 Note: Interface Module D1 or Inserter is necessary for connecting Finisher D6 or Finisher D6 with Booklet Maker to the printer.



Adobe PostScript



Adobe PDF Print Engine

global.fujifilm.com

Manufacturer

**FUJIFILM**

FUJIFILM Business Innovation Corp.

Distributor

**FUJIFILM Corporation**

7-3, Akasaka 9-chome, Minato-ku, Tokyo 107-0052, Japan  
 Tel. +81-3-6271-3111

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

**Reproduction Prohibitions** Please note that reproduction of the following is prohibited by law: •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

**Trademarks** •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •Revoria, Revoria logo, Revoria Press and Revoria Flow are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •macOS and Bonjour are trademarks of Apple Inc., registered in the U.S. and other countries and regions. •Adobe, Adobe logo, PostScript and PostScript logo, Adobe PDF, Adobe PDF Print Engine are either registered trademarks or trademarks of Adobe in the United States and/or other countries. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



### For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

The information is as of September, 2021. PIC-0183 FF (2109)