

<p>1. An error is displayed on the screen. Check your printer for Ink warning lights that are displayed.</p>	<p>2. The orange ink light shown above indicates it's necessary to replace an ink cartridge. This example shows a Y (yellow) cartridge.</p>	<p>3. Open cartridge cover on the side that needs to be replaced. If the warning buzzer is on a buzzer sounds when you open the cover.</p>
<p>4. Press the ink cartridge requiring replacement lightly to unlock it.</p>	<p>5. Remove the cartridge, there can be ink around the Ink supply port, so be careful not to get ink on hands or surrounding area.</p>	<p>6. Remove the new cartridge from packaging and place old one in box for recycling.</p>
<p>7. Do not touch (A) the chip otherwise a ink error might occur or (B) the ink port because ink could leak out.</p>	<p>8. Slide the new ink cartridge all the way into the printer until it clicks and locks then close the cartridge cover.</p>	<p>9. Printing will automatically resume.</p>



10. When it's time to replace the Maintenance Cartridge a 2402 message will appear on Kiosk screen.

11. Open cabinet door and check which warning light is lit. The one above indicates the Maintenance Cartridge needs replacement.


12. Open the cover on the right, if the warning buzzer is on a buzzer sounds when you open the cover.



13. To remove gently lift up and then pull out. Be careful not to tilt the cartridge.

14. Prepare a new Maintenance Cartridge. Be careful not to touch the chip on the new tank.

15. Insert the new Maintenance Tank. Push in until the tank locks

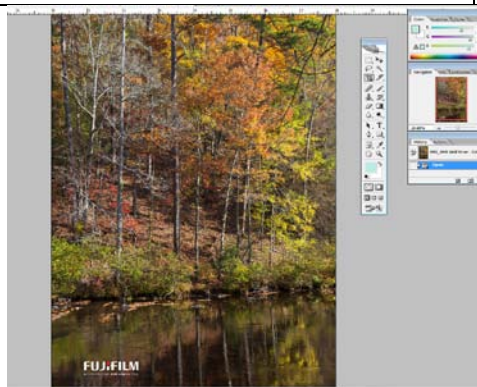

16. Close the cartridge cover and verify the printer's light is on.

17. Printing will automatically resume once the new Maintenance Cartridge is recognized.