



A4 Monochrome Printer

ApeosPrint 6340

 ApeosPrint™



Hello to the future of work

The "Apeos" series offers advanced features with high security level and easy operability to help business diversify with times.



Monochrome A4
65 ppm (Letter), 63 ppm (A4)
→ USB, Ethernet, Wi-Fi* connectivity
← *Optional

Superb Printing Quality

- Print resolution up to 1,200 x 1,200 dpi
- Super EA-Eco toner for fine text and fine lines

Fast output with no wait time

Quick startup and output for greater efficiency

- Print up to 63 ppm on A4 size
- Maximum 3,250 sheets paper capacity
Scalable for high-volume printing needs
- Automatic 2-sided printing
- High-yield toner cartridges
- Machine life up to 1,000,000 pages

Reducing environmental impact

- Toner save function in increments of 1%
- Super EA-Eco toner: Fusing achieved at a low temperature contributes to low power consumption
- Functions contributing to paper consumption reduction
 - Private Charge Print, Pages per Side/ Multiple-Up, 2-Sided Print* etc.

* All the print drivers provided by FUJIFILM Business Innovation Corp. are default to 2-Sided Printing setting at installation.

Flexible. Secure. Reliable

Supports flexible work style

Supports Wireless LAN environment*.

- Being wireless-enabled, device can be installed anywhere in your office
- Up to five Wi-Fi Direct devices can be connected at the same time
- You can easily print from mobile devices using Print Utility, AirPrint, and Mopria® Print Service

* Optional

Supporting Universal Print by Microsoft*¹

By registering ApeosPrint 6340 to Universal Print by Microsoft in advance, users*² authenticated with Microsoft Entra ID*³ can print from anywhere through cloud.

*1: Optional Storage (SSD) is required.

*2: Organizations with Microsoft Windows Enterprise or Microsoft 365 subscriptions.

*3: Formerly Azure Active Directory.

Safeguard Important Information

- Prevents paper information leakage with Secure Print and Private Charge Print with IC card authentication*.
- Newly support WPA3 as latest wireless LAN security protocol and adopt TPM (Trusted Platform Module) 2.0, as a security chip that conforms to the latest standards with enhanced encryption.
- Detects tampering of device software and self-repairing feature protects and repairs device software against tampering events.
- Provides more robust and secured office environment with enhanced security feature of both hardware and software.

* Optional

Reliable support system

From consumables replacement to unexpected device failures, most problems can be resolved without waiting for the service or sales representatives.

- Resolve problem using the "Help" function on the device



Robust yet compact, ApeosPrint 6340 can be installed just the way you like

Simple layout with easy navigation

Dark-colored background UI gives better contrast for easy recognition


- Icons are evenly spaced out for easy recognition
- Home screen personalization for ease of access to commonly used functions
- Clear visible light notifications for completed or error jobs
- Subtle sound notification for alert and attention

Smart & scalable

- 1. 5-inch color touch panel:**
Intuitive color touch panel lets you find just what you want at a glance
- 2. USB port:**
Use your own USB flash drive to print directly
- 3. Output tray:**
Capacity is 500 sheets
- 4. Bypass Tray (150 sheets):**
Supports various paper types such as envelopes and postcards
- 5. Standard Tray (550 sheets):**
For standard users. Supports various types & sizes of paper
- 6. 550-Sheet Feeder*¹ (550 sheets):**
Up to four optional 550-Sheet Feeders can be installed
- 7. High Capacity Feeder*¹ (2,000 sheets):**
Maximum paper-feeding capacity of 3,250 sheets*² to support high-volume printing needs
- 8. Caster*¹:**
For easy installation and moving on the floor
- 9. Cabinet*¹:**
Convenient for storing paper and consumables
- 10. IC Card Reader*¹:**
You can use Private Charge Print with your IC card

*1 Optional

*2 Standard + 550-Sheet Feeder + High Capacity Feeder

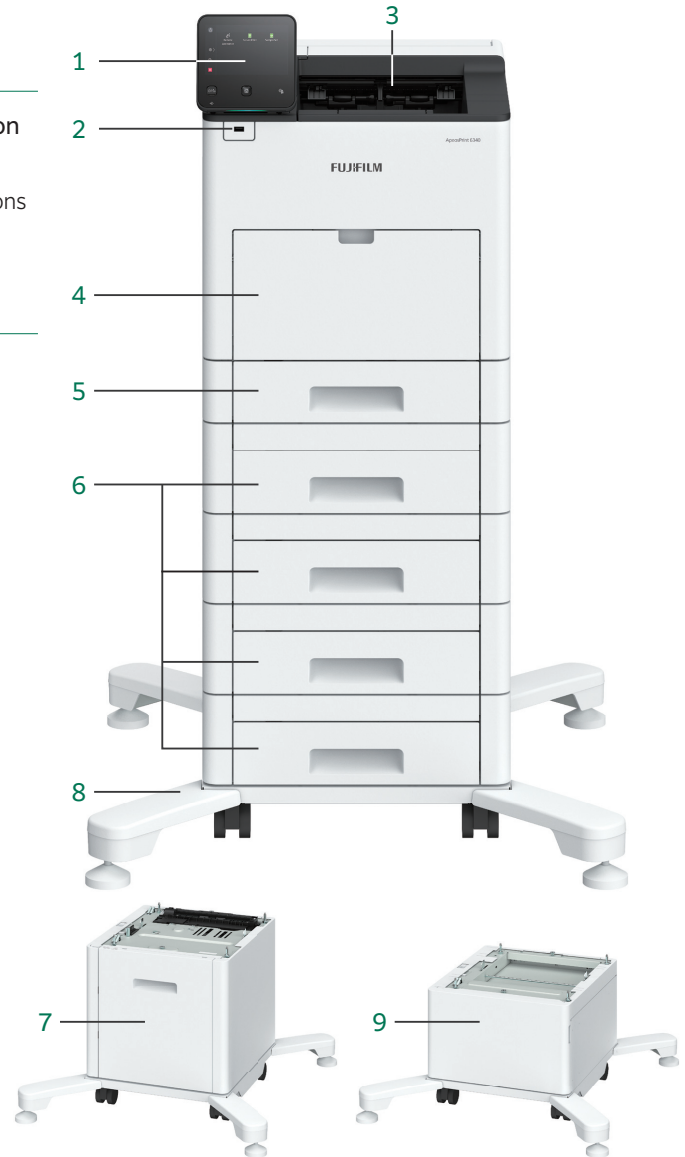

Complete with Finisher-S or Mailbox

Finisher-S, space-saving type

Collates and staples up to 50 sheets

Note: Only Single stapling



4-Bin Mailbox

Easy collates / sorting with each tray supports up to 100 sheets



Product Name	Product Life
Drum Cartridge Black (Starter)	Up to 60,000 pages* ¹
Drum Cartridge Black	Up to 60,000 pages* ¹
Toner Cartridge Black (Starter)	Up to 10,000 pages* ²
Toner Cartridge Standard Black	Up to 12,000 pages* ²
Toner Cartridge High-capacity Black	Up to 30,000 pages* ²
Fusing Unit 110v	Up to 200,000 pages
Transfer Module	Up to 200,000 pages
Paper Roller Kit	Up to 100,000 pages
Staple Cartridge Type XE	5,000 x 2pcs

*1: The number of printable pages is a reference value derived from the average of 3 sheets printed in A4, 1 sided, image coverage per 5 % in one setting, under continuous printing usage conditions. The actual number of printable pages may vary to below half the reference value, depending on paper type, paper direction, input/output tray settings, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions.

*2: Published value based on ISO/IEC 19752 standards. The actual number of printable pages may vary significantly from the published value, depending on printing content, paper size, paper type, usage conditions, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions.

ApeosPrint 6340

Functions & Specifications

Items	Description	
Printing Method	LED Electrophotography	
Warm-up Time	37 seconds or less (23 degrees Celsius room temperature). 20 seconds or less from Sleep Mode.	
Continuous Print Speed*1	Simplex	65 ppm (Letter) / 63.0 ppm (A4)
	Duplex	58 ppm (Letter) / 55.0 ppm (A4)
First Print Output Time*2	3.6 seconds (Letter / A4)	
Printing Resolution	Standard	[PCL Driver] Standard: 1,200 x 1,200 dpi, High Quality: 1,200 x 1,200 dpi, High Resolution: 1,200 x 1,200 dpi
	Optional	[Adobe® PostScript® 3™ Driver] High Speed (Standard): 1,200 x 1,200 dpi, High Quality: 1,200 x 1,200 dpi, High Resolution: 1,200 x 1,200 dpi
Paper Size	Standard Tray	A5, JIS B5, A4, Statement (139.7 x 215.9 mm), Executive (184 x 267 mm), Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, Com-10, Monarch, DL, C5, Custom Size (Width: 76.2 to 215.9 mm, Length: 190.5 to 355.6 mm)
	Bypass Tray	A6, JIS B6, A5, JIS B5, A4, Statement (139.7 x 215.9 mm), Executive (184 x 267 mm), 8 x 10" (203.2 x 254.0 mm), Letter, 215 x 315 mm, 8.5 x 13" (215.9 x 330.2 mm), Legal, COM-10, Monarch, DL, C5, Custom Size (Width: 64 to 215.9 mm, Length: 127.0 to 520 mm)
	Optional Tray	550-Sheet Feeder: A5, JIS B5, A4, Executive (184 x 267 mm), Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, Custom Size (Width: 76.2 to 215.9 mm, Length: 190.5 to 355.6 mm) High Capacity Feeder: A4, Letter
	2 Sided Printing	A4, JIS B5, A5, Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, Executive (184 x 267 mm), Custom Size (Width: 139.7 to 215.9 mm, Length: 203.2 to 355.6 mm)
Paper Weight*3	Standard Tray	60 to 220 gsm / 16 lb. bond to 122 lb. index
	Bypass Tray	60 to 220 gsm / 16 lb. bond to 122 lb. index
	Optional Tray	550-Sheet Feeder: 60 to 220 gsm / 16 lb. bond to 122 lb. index High Capacity Feeder: 60 to 176 gsm / 16 lb. bond to 46 lb. bond
2 Sided Printing	60 to 176 gsm / 16 lb. bond to 46 lb. bond	
Paper Tray Capacity*4	Standard	Standard Tray: 550 sheets, Bypass Tray: 150 sheets
	Optional	550-Sheet Feeder: 550 sheets High Capacity Feeder: 2,000 sheets
	Max	3,250 sheets [Standard + 550-Sheet Feeder + High Capacity Feeder]
Output Tray Capacity*4	500 sheets (Face down)	
CPU	ARM Dual Core 1.3 GHz	
Memory Capacity	4 GB (Max: 4 GB)	
Storage Device Capacity*5	3.6 GB, Optional: 128 GB*6	
Page Description Language	Standard	PCL5 / PCL6
	Optional	Adobe® PostScript® 3™
Supported Operating System*7	Standard	[PCL Driver] Windows 11 (64 bit) / Windows 10 (32 bit / 64 bit) / Windows Server 2025 (64 bit) / Windows Server 2022 (64 bit) / Windows Server 2019 (64 bit) / Windows Server 2016 (64 bit) [Mac OS X Driver] macOS 15 / 14 / 13 / 12 / 11
	Optional	[Adobe® PostScript® 3™ Driver] Windows 11 (64 bit) / Windows 10 (32 bit / 64 bit) / Windows Server 2025 (64 bit) / Windows Server 2022 (64 bit) / Windows Server 2019 (64 bit) / Windows Server 2016 (64 bit) macOS 15 / 14 / 13 / 12 / 11
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0, USB2.0
	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)
Network Protocol	TCP/IP (ipd, IPP, Port9100)	
Power Supply*8	AC110-127 V +/- 10%, 12 A, 50/60 Hz	
Operating Noise*9*10	In Operation:	7.4 B, 56 dB (A)
	Ready Mode:	5.8 B, 33 dB (A)
Maximum Power Consumption	Max	1,130 W (AC110 V +/- 10%), 1,370 W (AC127 V +/- 10%)
	Sleep Mode	0.3 W
Dimensions*11	Average	Ready Mode: 77 W In Operation: 857 W
		W 427.5x D 464.5 x H 443.4 mm / W 16.9 x D 18.3 x H 17.5"
Weight*12		23.1 kg / 51 lb. (Including consumables and drum)
		22.0 kg / 49 lb. (Excluding consumables and drum)

Notes

- 1) To comply with paper weight specifications, it is recommended to use our recommended paper. Document may not be printed correctly depending on usage conditions.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

- *1: When Continuously Printing Original in A4 (Plain). The performance may be reduced depending on the paper type and the paper size. The speed may be reduced due to the image quality adjustment.
- *2: When feeding from feeder tray of machine. Numeric value varies depending on output environment.
- *3: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.
- *4: 80 gsm paper.
- *5: The Storage Device Capacity is not totally available for customers.
- *6: When the optional Storage (SSD) is installed.
- *7: Please refer to our official website for the latest supported OS.
- *8: Power outlets that provide the above power level is recommended. Maximum machine measured current: 8 A.
- *9: Measured in accordance to ISO7779. Unit B: Sound Power Level LWAd. Unit dB: Radiated Sound Pressure Level LpAm (bystander position), as reference value.
- *10: Main unit only.
- *11: 550-Sheet Feeder (height): 123 mm (The height increment when the option is installed).
- *12: Including Toner Cartridge. 550-Sheet Feeder: 6.6 kg.

550-Sheet Feeder (Optional)

Item	Description
Paper Size	Max: A4, Letter, Legal Min: A5 Custom Size: 76.2 x 190.5 mm to 215.9 x 355.6 mm
Paper Weight	60 to 220 gsm / 16 lb. bond to 122 lb. index
Feeding Capacity*1 / Number of Tray*2	550 sheets x 1-tray
Dimensions	W 420 x D 465 x H 123 mm / W 16.6 x D 18.4 x H 4.9" *3
Weight	6.6 kg / 15 lb.

- *1: 80 gsm paper.
- *2: Up to 4 trays can be added.
- *3: When excluding installing connections.

High Capacity Feeder (Optional)

Item	Description
Paper Size	A4, Letter
Paper Weight	60 to 176 gsm / 16 lb. bond to 46 lb. bond
Feeding Capacity / Number of Tray*	2,000 sheets x 1-tray
Dimensions / Weight	W 724.2 x D 772.1 x H 459 mm / W 28.6 x D 30.4 x H 18.1", 24.0 kg / 53 lb.

* 80 gsm paper.

Finisher-S (Optional)

Item	Description	
Type	Sort (Offset available) / Stack (Offset available)	
Paper Size	A4, JIS B5, Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal Custom Size: Width: 176.0 to 215.9 mm, Length: 250.0 to 355.6 mm	
Paper Weight	60 to 220 gsm / 16 lb. bond to 122 lb. index [Without Stapling] 500 sheets (80 gsm or less) [With Stapling] 60 sets, or 300 sheets (90 gsm or less)	
Paper Capacity*1	Finishing Tray	500 sheets
	Output Tray	500 sheets
	Capacity	50 sheets (90 gsm or less)
Staple	Paper Size*2	Max: A4, Letter; Min: JIS B5
	Paper Weight	60 to 220 gsm / 16 lb. bond to 122 lb. index
	Position	Single stapling
Dimensions / Weight	W 478 x D 451 x H 248 mm / W 18.8 x D 17.8 x H 9.8", 6.8 kg / 15 lb.	

- *1: 70 gsm paper.
- *2: Available staple positions vary depending on the paper size.

Mailbox (Optional)

Item	Description	
Type	Mailbox	4-bin Sort / Stack
Paper Size	Mailbox	A4, JIS B5, Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal Custom Size: Width 176.0 to 215.9 mm, Length 250.0 to 355.6 mm
Paper Weight	Mailbox	60 to 176 gsm / 16 lb. bond to 46 lb. bond
Paper Capacity*	Mailbox	Each bin 100 sheets
	Output Tray	400 sheets
Dimensions / Weight	W 411 x D 451 x H 248 mm / W 16.2 x D 17.8 x H 9.8", 5.3 kg / 12 lb.	

* 70 gsm paper.



FUJIFILM

FUJIFILM Business Innovation Corp.

Headquarters

9-7-3, Akasaka Minato-ku, Tokyo 107-0052

TEL: +81-3-6271-5111

fujifilm.com/fbglobal

The available model varies depending on the country/region. Please ask the sales representatives for details. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •Apeos, Cloud On-Demand Print is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. •Mopria the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.